

1-Port Gigabit GPON Terminal

GP601GVR










www.comnect.com.cn



Shenzhen Comnect Technology Co., Ltd

Access to Fiber Optical Network

Support downstream 2.5Gbps and upstream to 1.25Gbps with transmission distance up to 20km. Higher bandwidth support makes it possible to integrate and provide more additional services.

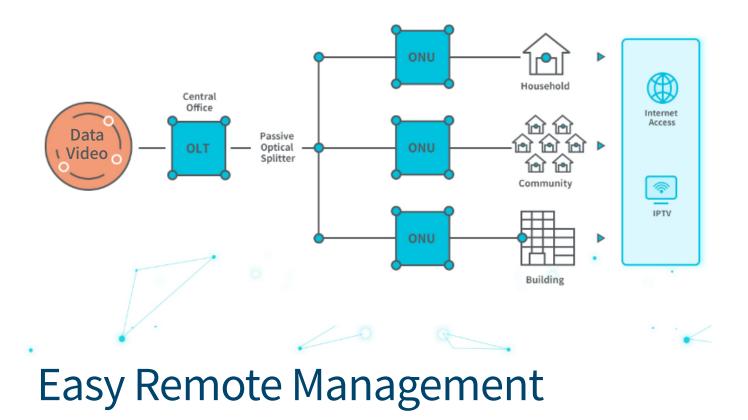


GP601GVR support the ONT Management and Contol Interface (OMCI), making it easy to configure, activate and manage remotely from an Optical Line Terminal(OLT).



Fiber access and gigabit port provide incredibly fast transfer speeds

GP601GVR is a next-generation Gigabit Passive Optical Network (GPON) router, ideal for Fiber to The Home solution. It's an incredibly robust device allowing users to access high-speed internet connections via its GPON port and share it with a Gigabit Ethernet port.

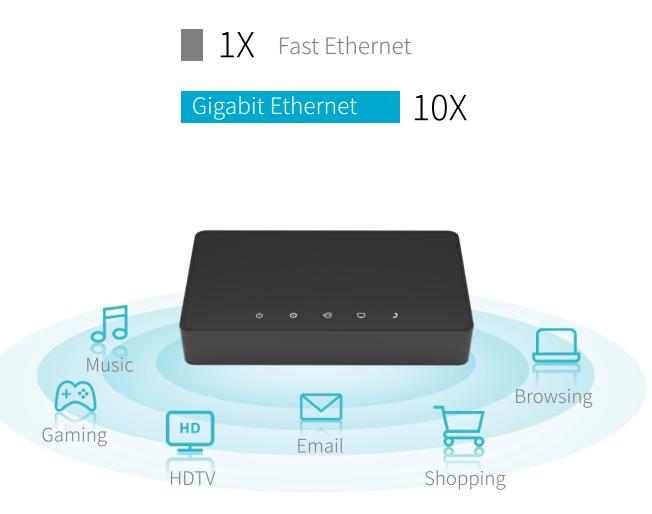





Specifications

General

- GPON Standards: ITU-T G.984
- Distance: 20Km Max
- Data Rates: Upstream: 1.25Gbps, Downstream: 2.5Gbps
- VOIP Standards: SIP (RFC3261), ITU-T G.729/G.722/G.711a/G.711

Hardware

- Interfaces: 1 x SC/APC GPON Port, 1 x 10/100/1000Mbps LAN Port, 1 x FXS Port
- Buttons: Power ON/OFF Button, Reset Button
- Power Supply: DC 12V 0.5A
- Dimensions (W X D X H): 90*73*25.2mm

Software Features

- Quality of Service: WMM, Bandwidth Control
- Port Forwarding: L2/L3 forwarding, L3 NAPT
- VPN: 802.1Q tag VLAN, VLAN transparent mode/VLAN translation mode/VLAN trunk mode
- Access Control: Local Management Control, Host List, Access Schedule, Rule Management
- Firewall Security:
- DoS, SPI Firewall
- IP Address Filter/MAC Address Filter/Domain Filter
- IP and MAC Address Binding
- Management: Access Control, Local Management, Remote Management

Shenzhen Comnect Technology Co., Ltd www.comnect.com.cn


Environment

Package Contents

- 1 x GPON Router
- 1 x Power Adapter
- 1 x Ethernet Cable

Certifications

• CE, RoHS

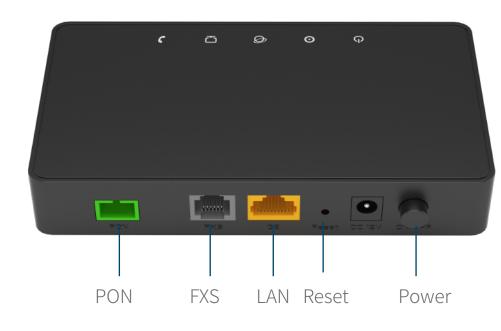

Specifications are subject to change without notice. Comnect is a registered trademark of Comnect Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2022 Comnect Corporation. All rights reserved.

• Operating Temperature: 0°C~40°C (32°F~104°F) • Storage Temperature: -40°C~70°C (-40°F~158°F) • Relative Humidity: 10%~90%, non-condensing • Storage Humidity: 5%~95%, non-condensing